


表2-F形の寸法

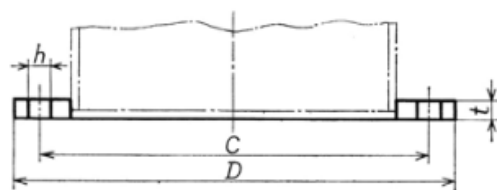

単位mm

呼び径	適用する 鋼管の外径	フランジ					ボルトの ねじの呼び
		D	t	ボルト穴			
				中心円の径 C	数	h	
550	558.8	660	16	620	16	23	M20
600	609.6	710	16	670	16	23	M20
650	660.4	760	16	720	16	23	M20
700	711.2	815	16	775	16	23	M20
750	762.0	865	16	825	20	23	M20
800	812.8	915	16	875	20	23	M20
850	863.6	965	16	925	20	23	M20
900	914.4	1025	18	980	20	25	M22
950	962.0	1075	18	1030	20	25	M22
1000	1016.0	1125	18	1080	20	25	M22
1050	1062.0	1175	18	1130	24	25	M22
1100	1117.6	1225	18	1180	24	25	M22
1150	1162.0	1275	18	1230	24	25	M22
1200	1219.2	1325	18	1280	24	25	M22
1250	1262.0	1375	18	1330	28	25	M22
1300	1312.0	1425	18	1380	28	25	M22
1350	1371.6	1475	18	1430	28	25	M22
1400	1412.0	1525	20	1480	28	25	M22
1450	1462.0	1595	20	1540	28	27	M24
1500	1524.0	1645	20	1590	28	27	M24
1600	1612.0	1745	20	1690	28	27	M24
1700	1712.0	1845	20	1790	28	27	M24
1800	1812.0	1950	20	1895	32	27	M24
1900	1912.0	2050	20	1995	32	27	M24
2000	2012.0	2150	20	2095	36	27	M24
2100	2116.0	2250	24	2195	36	27	M24
2200	2216.0	2350	24	2295	40	27	M24
2300	2316.0	2450	24	2395	40	27	M24
2400	2416.0	2550	24	2495	40	27	M24
2500	2516.0	2650	24	2595	48	27	M24
2600	2616.0	2750	24	2695	48	27	M24